

HYBRID

PVC BOULDER MAT WITH CARPET COVER

Polkok
PROTECHMAT

Hybrid is a connection of the best features of the mat in PVC cover and mat with extra independent carpet on top.

CHARACTERISTICS:


- ✓ durability of PVC mat core
- ✓ designed for areas with heavy traffic
- ✓ no dust in the air thanks to the carpet cover
- ✓ compliance with DIN EN 12572-2 Annex C (30cm)
- ✓ core elements easy to install or replace
- ✓ no glue needed

VERSIONS:

- ▶ thickness 30cm or other on request
- ▶ dimensions: according the clients enquiry

AVAILABLE AS:





DIY **P**PROTECHMAT
Do it Yourself system

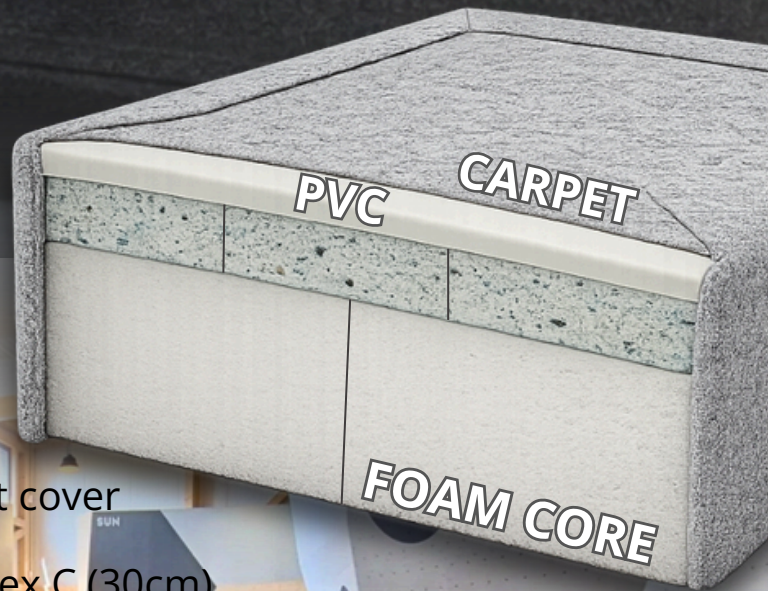

HYBRID

PVC BOULDER MAT WITH CARPET COVER

EIGHTEEN COLOURS OF THE CARPET TO CHOOSE:



Fireproof **Cfl-s1** carpet certification




← **2m** wide rolls of carpet
easy to unfold

HYBRID

PVC BOULDER MAT WITH CARPET COVER

PRODUCT DATA SHEET

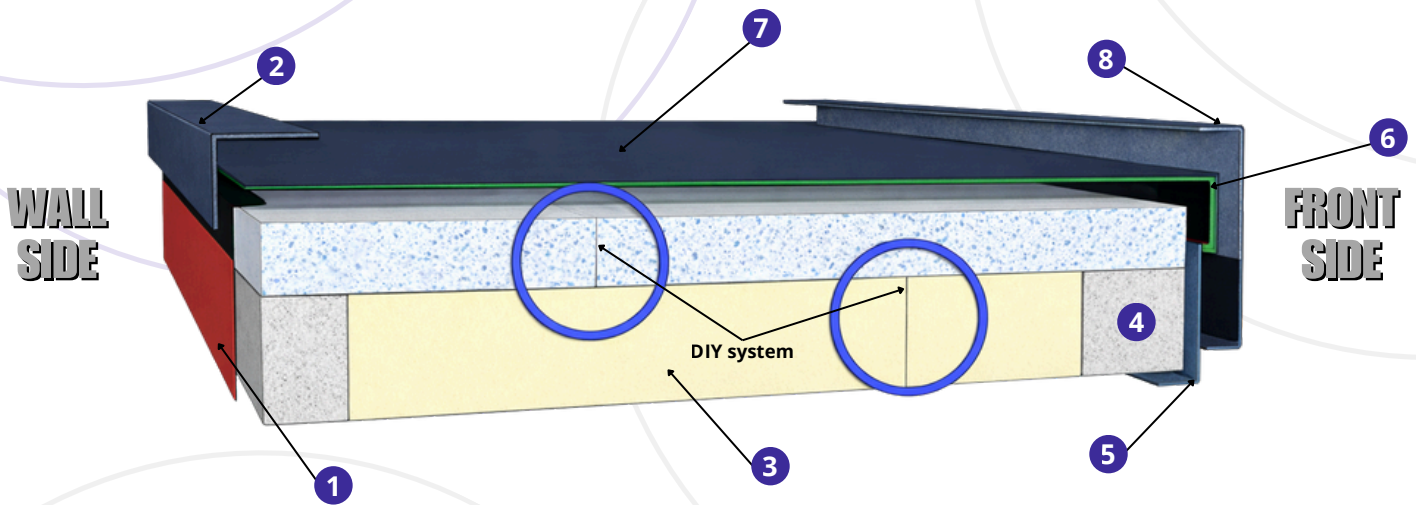

- 1** Mounting of PVC flaps with hook and loop tape fastened directly to the wall or screwed to the floor.
- 2** Corner flaps made of same carpet as top covering mounted PVC flaps.
- 3** Mat core consist of PU foam of average density of 25kg/m³ and RG foam 120kg/m³. Mat consists of two layers (bottom and top) joined together with hook and loop tape in a DIY system (glue is not required).
- 4** Entry area: harder foam, RG 140kg/m³ for easier and stable entry onto the mat
- 5** Bottom corner flap made of the carpet, screw directly to the floor
- 6** PVC cover: made of PVC material density min. 900g/m²
- 7** Top layer made of carper (in rolls) - width of each roll not more than 200cm
- 8** Corner flaps made of same carpet as top covering mounted to botton corner flaps and top carpet

NOTE: The wall must have space at right angle to the ground min. 3cm more than thickness of mat - to fit the mat there.



Contact us:
Polskok Sp. z o.o.
Wodzińska 1 Str
32-500 Chrzanów

☎ +48 729 010 200 / +48 509 244 745
✉ polskok@polskok.com.pl

Visit our page

